




FACTSHEET*
A60 SSG
GLASS FIRE SLIDING DOOR

The SSG-A60 Glass fire sliding door offers robust and stylish protection for both internal and external applications in A60 environments. Its steel frame provides superior durability compared to traditional aluminum frames, ensuring toughness and longevity. This door meets rigorous fire safety standards and adds a modern touch to any maritime or offshore installation.

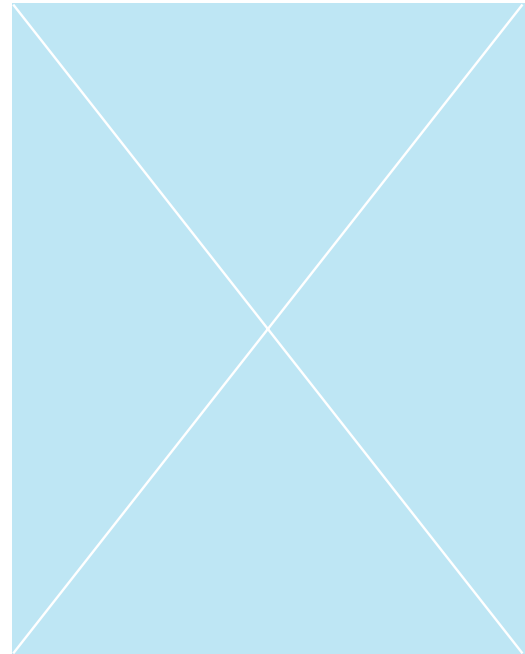

TECHNICAL DATA:

- Fully MED-B certified (BV No. 78120/A0 MED)
- Maximum clear opening of 2300mm x 1300mm
- Door frame and glass frame made from Galvanized Steel or Stainless Steel
- Can come primed, painted, S/S Satin finish, S/S Polished
- Glass for Internal Use: AGC Glass Pyrobell EI60, 25mm thickness
- Glass for External Use: AGC Glass Pyrobell EI60, 25mm thickness + 6mm gap + 8mm Triplex/Laminated, total thickness of 41mm (UV value of 1.9W/m²K)
- Due to testing for 68 minutes, the dimensions of the door may be increased by 15% in height and width, provided the surface area is not increased by more than 10%.

ADDITIONAL PICTURE/GRAPHIC:



WEBPAGE >>