




FACTSHEET*

A60_SDFL

DOUBLE LEAF FIRE SLIDING DOOR

The A60 SDFL double leaf fire sliding door is engineered to provide maximum fire protection and durability for maritime and offshore applications. Its robust construction and dual leaf design ensure optimal functionality and safety. Like its single leaf counterpart, this door is MED-B certified, guaranteeing its reliability in critical conditions. The A60 SDFL provides enhanced access and superior fire protection, making it an excellent choice for larger openings in marine and offshore environments.

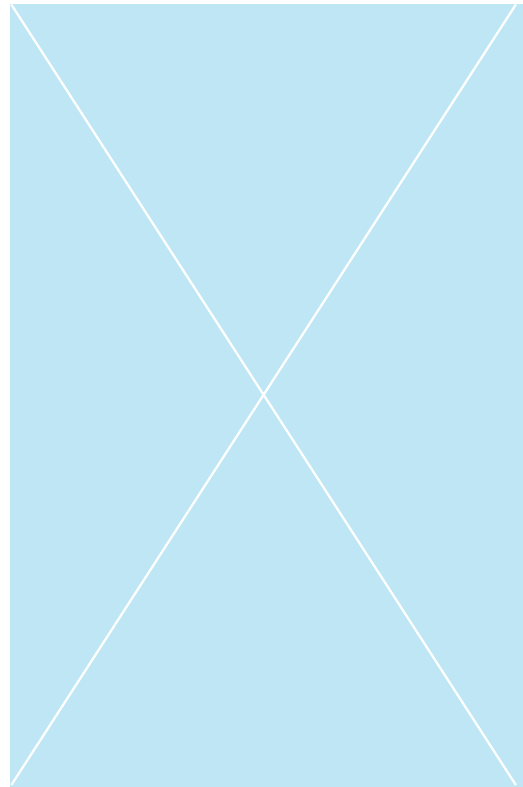

TECHNICAL DATA:

- Fully MED-B certified (RINA No: MED048619CS/001)
- Maximum clear opening of 5000mm x 3000mm
- Available with bolt-on or welded frame options
- Frame constructed from 4 mm pressed profile mild steel
- Equipped with SST AISI 304 ball bearing guiding rollers, adjustable and mounted inside the frame
- Door panels made from 1mm galvanized steel
- Insulated with Caretta insulation board
- Features fire hooks with blasted stainless steel recessed door handles
- Comes with either flush 5 mm sills or U-profiles
- Door leaf cladding up to 20mm
- Can accommodate non-combustible flooring underneath the door
- Available in AISI 304 or 316 stainless steel options

ADDITIONAL PICTURE/GRAPHIC:



WEBPAGE >>