




FACTSHEET*

A60 SDF TANDEM

TANDEM LEAF FIRE SLIDING DOOR

The A60 Tandem double leaf fire sliding door is specifically designed for applications requiring wide, coordinated openings with high fire resistance by sliding multiple door leaves in the same direction, thus decreasing the required pocket space. Certified to MED-B standards, the tandem door offers robust performance and reliability. The A60 Tandem door combines the advantages of wide access with superior fire protection, making it an excellent choice for critical maritime and offshore installations.

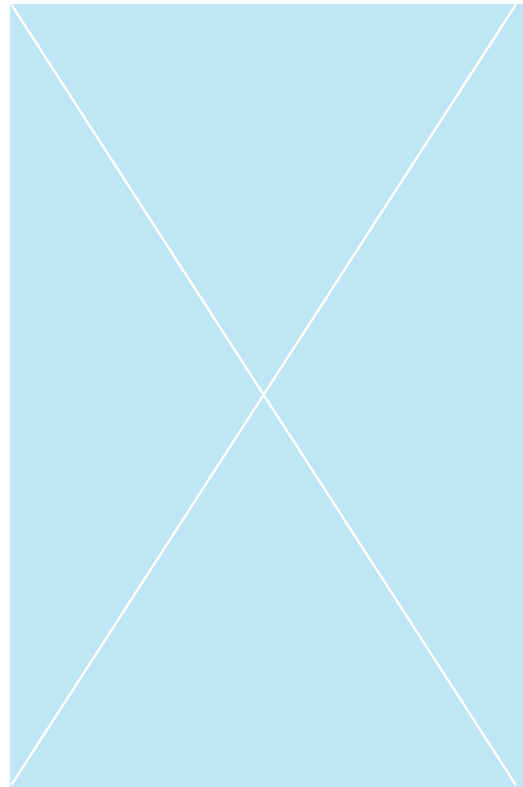

TECHNICAL DATA:

- Fully MED-B certified (BV No: 59411/A0 MED)
- Maximum clear opening size: 3500mm x 2523mm
- Frame constructed from 4 mm pressed profile mild steel
- Equipped with SST AISI 304 ball bearing guiding rollers, counter hooks, adjustable and mounted inside the frame
- Door panels made from 1mm galvanized steel
- Insulated with Caretta™ insulation board
- Features fire hooks with blasted stainless steel recessed door handles
- Comes with either a flush 5 mm sill or U-profile
- Prime finished in Jotun Grey
- Maximum dimensions of door leaves:
- 1900mm x 2600mm (closest leaf to bulkhead)
- 1879mm x 2600mm (furthest leaf from bulkhead)
- Available in AISI 304 or 316 stainless steel options

ADDITIONAL PICTURE/GRAPHIC:



WEBPAGE >>