




FACTSHEET*

A60 SSRE

SEMI WATERTIGHT SLIDING DOOR

The SSRE-A60 single leaf sliding rebated door is an A60 rated fire door designed to offer both fire resistance and semi-watertight capabilities. Ideal for areas requiring fire protection and water resistance, this door withstands water columns up to 3 meters and ensures safety and durability with its four-sided sealing. The SSRE-A60 door combines fire safety with water resistance, making it an ideal choice for maritime and offshore environments where both elements are critical.

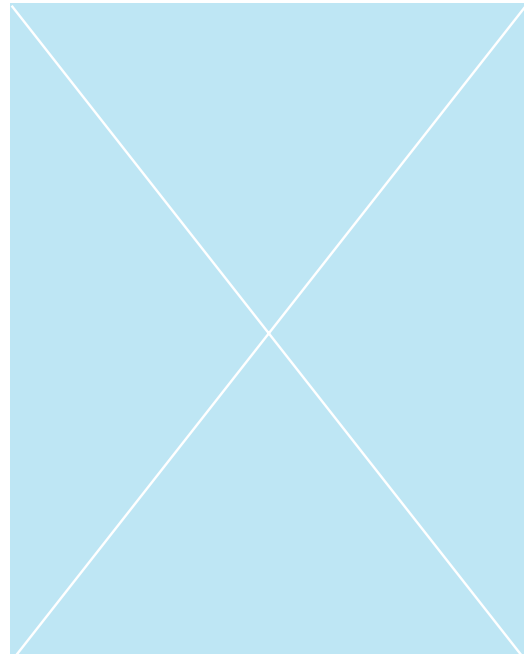

TECHNICAL DATA:

- Fully MED-B certified (MED020924CS/003)
- Single leaf, A60 rated fire sliding door
- Maximum clear opening of up to 2210x2410mm
- Semi-watertight, capable of withstanding water columns up to 3 meters
- Frame and doorleaf can come in steel, AISI 304, AISI316
- Spliced intelligence lip seal arrangement with adjustable seal holder
- Can be installed bolted or welded to the bulkhead
- Head Pressure Ratings:
 - 2000mm x 900mm: 30 kN/m² (0.3 bar)
 - 2000mm x 1200mm: 26 kN/m² (0.26 bar)
 - 2000mm x 1500mm: 17.5 kN/m² (0.175 bar)
 - 2000mm x 2400mm: 12 kN/m² (0.12 bar)
- For special dimensions, maximum head pressure will be provided accordingly

ADDITIONAL PICTURE/GRAPHIC:



WEBPAGE >>